

Special Mount for Light Fittings



APPLICATION



The special light fitting mount is similar to the 'J' type mount in operation. It is employed where vibration protection or isolation is not a requirement.

DESCRIPTION


The special fluorescent light fitting mount is designed to yield at a predetermined load in any direction under shock. It provides no vibration isolation. The mounting is made from mild steel strip, protected from corrosion by zinc plating.

CORRECT METHOD OF MOUNTING LIGHT

*ALTERNATIVE METHOD OF MOUNTING LIGHT
(To avoid obstructions)*

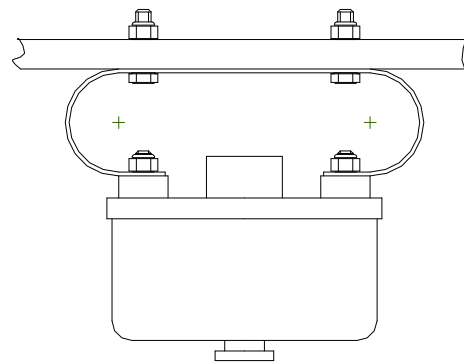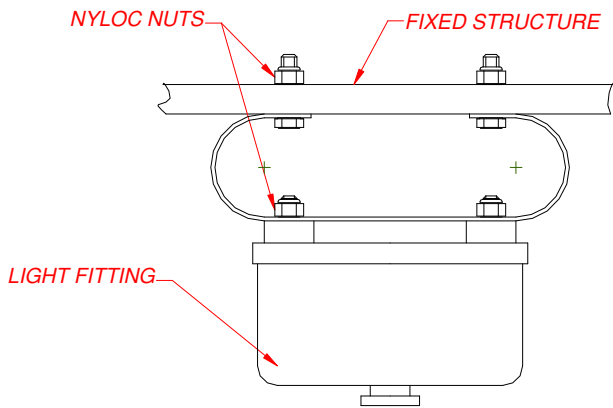

NOTE: 25mm CLEARANCE REQUIRED ALL AROUND AND ABOVE THE FITTING

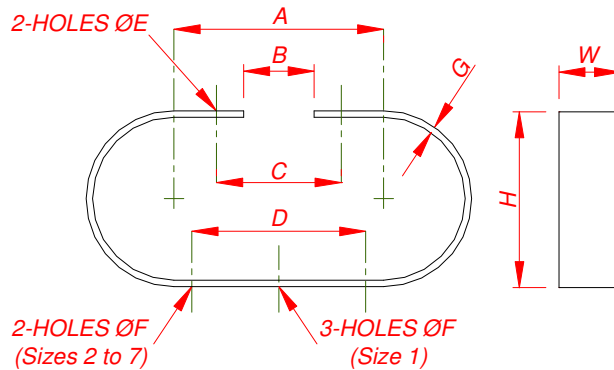

Mount Size	NATO Stock Number	CORP. Number	AP Number & Type	Mass Range	Dimensions								
					(kg)	A	B	C	D	E	F	G	H
1*	5340-99-543-3304	10000778	-	5 -10	127	80	102	76	9,5	8,5	2	86	25
2	5340-99-543-3305	10000798	-	5 -10	182	80	102	152	9,5	8,5	2	86	25
3	5340-99-543-3306	10000801	-	2.5 -5	127	25	76	92	9,5	8,5	1	52	25
4	Not Allocated	-	17720-A	5 -10	127	80	102	102	9,5	9,5	2,4	87	25
5	Not Allocated	-	17720-B	2.5 -5	127	25	76	102	9,5	9,5	1,6	53	25
6	Not Allocated	-	17720-B1	2.5 -5	127	86	102	102	9,5	9,5	1,6	53	25
7	Not Allocated	-	17720-C	1.5 -2.5	76	19	51	57	4,8	4,8	1,6	41	16

*Size 1 has three holes in the base instead of two.

CAPARO
DYNAMICS
VIBRATION SHOCK AND NOISE CONTROL



INVESTOR IN PEOPLE

A Division of
CAPARO
ENGINEERING
Limited



Caparo Dynamics, P.O. Box 36, Corngreaves Road, Cradley Heath, West Midlands, B64 7DQ, United Kingdom
Telephone: +44 (0)1384 563220 Fax: +44 (0)1384 563225 sales@caparo-dynamics.com www.caparo-dynamics.com
Due to a policy of continuous development and improvement, product specifications can alter without notice.