

# Type P4<sup>1</sup>/<sub>2</sub>




## APPLICATION

Shock and Vibration Isolation of industrial and commercial equipment.

## DESCRIPTION

The mounting consists of mild steel angle section, bonded to natural rubber to MOD Standard 02-82. The rubber is protected by red lacquer to Specification MOD NPL100. The steel is painted in low sheen black.

Nominal Supported Mass per Mounting is 450 kg

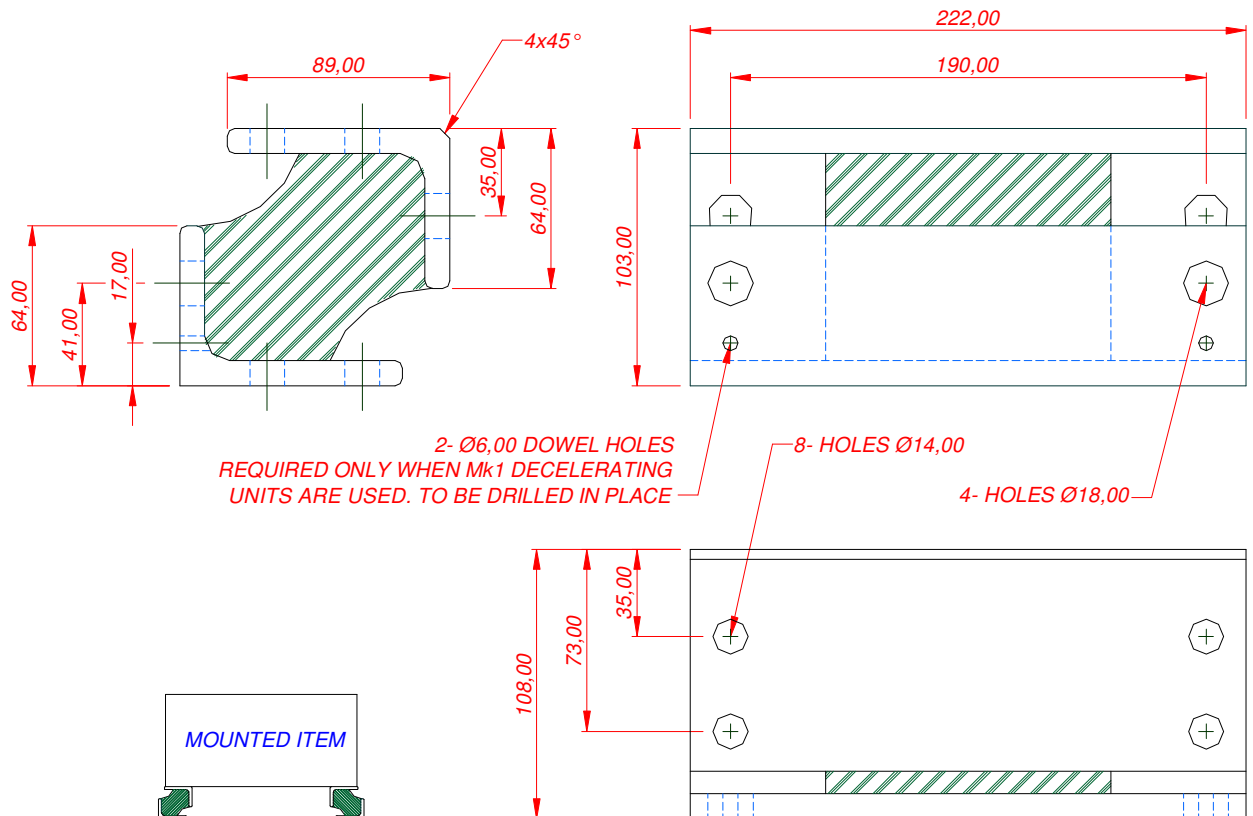

**CAPARO**  
DYNAMICS  
VIBRATION SHOCK AND NOISE CONTROL



INVESTOR IN PEOPLE

A Division of  
**CAPARO**  
ENGINEERING  
Limited



Caparo Dynamics, P.O. Box 36, Corngreaves Road, Cradley Heath, West Midlands, B64 7DQ, United Kingdom  
Telephone: +44 (0)1384 563220 Fax: +44 (0)1384 563225 sales@caparo-dynamics.com www.caparo-dynamics.com  
Due to a policy of continuous development and improvement, product specifications can alter without notice.