

"TW" Mount Series






APPLICATIONS

Vibration isolation of:

- Motor/ compressor/ pump units
- Generator sets
- Hydraulic units
- Fans and Blowers
- Transformers
- Vehicle cabs

DESCRIPTION

The TW series of mounts consist of two rubber parts: one 'washer' and one 'washer/bush'. The 'washer/bush' incorporates a metal bush, which acts as a guide for a fixing screw. It can be installed by two methods (see below) and various plate thicknesses can be accommodated

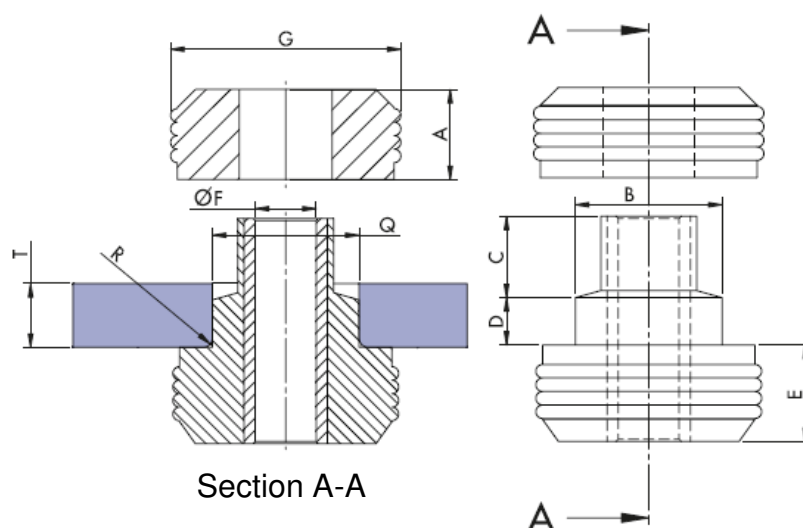

Size	A	B	C	D	E	F	G	R	Q	Tmax	Tmin	Weight (g)
1	20	31.2	18.1	10.5	21.4	13.5	48	1.5	31.8	14	12.5	153
2	22.5	39.5	24	15	23	16.5	64	2.5	38.1	22	19	350
3	25	58	29	19	25	22.5	90	3	57.15	29	25	675

Size	IRHD	45	60
1	Part No. Load (kg)	15/731 80	15/732 130
2	Part No. Load (kg)	15/733 120	15/734 260
3	Part No. Load (kg)	15/735 260	15/736 450

Rebound washer details

Size	Outside Diameter	Inside Diameter	Thickness	Part No.
1	54	13.5	4	15/737
2	67	16.5	5	15/738
3	96	22	6	15/739

CAPARO
DYNAMICS
VIBRATION SHOCK AND NOISE CONTROL



INVESTOR IN PEOPLE

A Division of
CAPARO
ENGINEERING
Limited



Caparo Dynamics, P.O. Box 36, Corngreaves Road, Cradley Heath, West Midlands, B64 7DQ, United Kingdom
Telephone: +44 (0)1384 563220 Fax: +44 (0)1384 563225 sales@caparo-dynamics.com www.caparo-dynamics.com
Due to a policy of continuous development and improvement, product specifications can alter without notice.